


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
1		2/7/2012	

NOTES:

1. TEMPERATURE RATING: 392°F (200°C)
2. WIRE LEADS TO BE 24" MINIMUM FLYING LEADS FROM END OF CONNECTOR OR AS DETERMINED BY CUSTOMER.
3. CONTACTS ARE GOLD PLATED PER MIL-G-45204C, TYPE I OR II, GRADE C OR D, CLASS 1 OVER NICKEL PER QQ-N-290A, CLASS 1, GRADE G

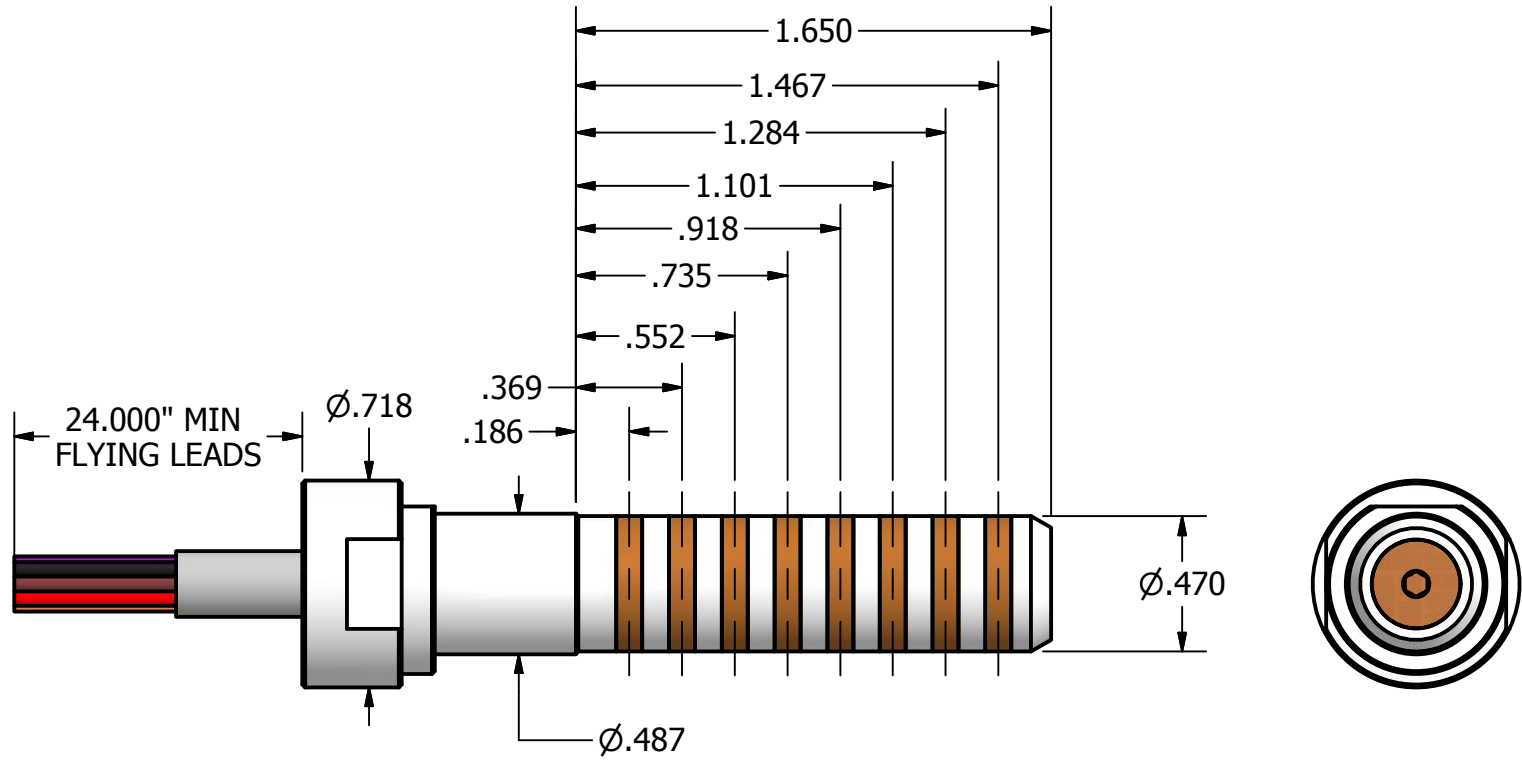

CONTACT	WIRE SIZE	COLOR
A	24 AWG	BLACK
B	24 AWG	BROWN
C	24 AWG	RED
D	24 AWG	ORANGE
E	24 AWG	YELLOW
F	24 AWG	GREEN
G	24 AWG	BLUE
H	24 AWG	VIOLET

WIRING DIAGRAM

DRAWN siselt	2/7/2012
CHECKED	
APPROVED	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: ANGULAR: ±.50° TWO PLACE DECIMAL ±.015 THREE PLACE DECIMAL ±.005 FOUR PLACE DECIMAL ±.0005 FILLET: R.032 MAX REMOVE ALL BURRS AND BREAK SHARP EDGES .015 MAX	



TITLE			
8 Conductor Rotatable 03			
SIZE	MATERIAL	DWG NO	REV
A		915-0109 SALES	1

All rights reserved. This document and the information contained herein are the sole property of Canyon Manufacturing Inc. Any reproduction or distribution in whole or in part without written permission of Canyon Manufacturing Inc. is prohibited.